Measuring Window "WIN294"



compliant with DVGW W294-3(2006), ÖNORM M5873 and DIN 19294

1/1

GENERAL FEATURES



Properties of the WIN294

The measuring window WIN294 is used for plug-in sensors in certified equipment for water purification compliant with W294-3(2006), ÖNORM M5873 and DIN 19294. The window has a G1" thread for connection to the purifier. The sensor is fixed with a consigned union nut. Specifications are customizable to different purifying systems.

Measuring window WIN294 is a required accessory for sglux "UV-DVGW" and "UV-ÖNORM" sensors or other plug-in sensors according to DVGW 294-3(2006), ÖNORM M5873 and DIN 19294.

SPECIFICATIONS

Specifications of the Window Parameter Value

Dimensions please refer to drawing below

Window Material SQ1

Pressure Resistance 16 bar

Window Size 23 x 5 mm

Specifications of the Steel Body Parameter Value

Material 1.4404


Length 65.4 mm

Wrench Size 32 mm

Front Thread G1"

Thread For Union Nut G7/8"

DRAWING

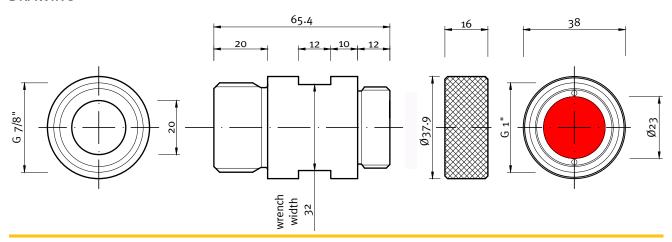

PRC Technologies Corp., Ltd. ลาดพร้าว 101 กรุงเทพ 10240

โทรศัพท : 02 530 1714, 02 932 1711 มือถือ : 086 360 8600

www.prctech-th.com

อีเมล : contact@prctech.net LINE ID1 : prctec-info, LINE ID2 : @prctec